

10-05-00

A

10/04/00

10668 U.S. PTO

PATENT APPLICATION TRANSMITTAL LETTER

(Large Entity)

Docket No.
45118-00026

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Jeb R. Linton

For: SYSTEM FOR ACCESS TO DIRECT BROADCAST SATELLITE SERVICES

10668 U.S. PTO
09/679590



Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. EL 702 182 680 US
- ☒ 3 sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☐ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: Assignment Document (Under Separate Cover)

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	16	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$80.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
TOTAL FILING FEE					\$710.00

- ☒ A check in the amount of \$710.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 50-1419 as described below. A duplicate copy of this sheet is enclosed.
 - ☐ Charge the amount of as filing fee.
 - ☒ Credit any overpayment.
 - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: October 4, 2000

Signature

Jeffrey A. Divney
 Registration No. 39,659
 MARSH FISCHMANN & BREYFOGLE LLP
 3151 South Vaughn Way, Suite 411
 Aurora, Colorado 80014
 (303) 338-0997

cc:

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)Applicant(s): **Linton**

Docket No.

45118-00026

Serial No.

Not Yet Assigned

Filing Date

October 4, 2000

Examiner

Not Yet Assigned

Group Art Unit

Not Yet Assigned

Invention:

SYSTEM FOR ACCESS TO DIRECT BROADCAST SATELLITE SERVICES

I hereby certify that this **Pat. App. Trans. Ltr., Pat. App., Declaration & 3 Sheets of Drawings**
(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under
37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231 on
October 4, 2000
(Date)

Theresa L. VanDerhoof

(Typed or Printed Name of Person Mailing Correspondence)


(Signature of Person Mailing Correspondence)**EL 702 182 680 US**

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.

SYSTEM FOR ACCESS TO DIRECT BROADCAST SATELLITE SERVICES

RELATED APPLICATIONS

5 This application claims priority benefit to U.S. Provisional Application Serial No. 60/192,494, filed on March 28, 2000, the entirety of which is incorporated by reference herein.

FIELD OF THE INVENTION

10 The present invention generally relates to a system for receiving a direct broadcast satellite signal from a direct broadcast satellite, and in particular, to a system for receiving direct broadcast satellite transmission in a mobile craft.

BACKGROUND OF THE INVENTION

15 In recent years, direct broadcast satellite systems have come into widespread use throughout the world for reception of digital television in the home, as a replacement for traditional wired cable television services. Direct broadcast satellite systems have also been used for high-speed Internet access, which is especially useful in areas where such access is otherwise unavailable. Direct broadcast satellite services have also been
20 utilized in large recreational vehicles, airliners, and ships, where large, gimbaled dish antennas under shielding domes are employed to receive direct broadcast satellite signals. Such gimbaled dishes are expensive, have a large profile and are only practical in large vehicle applications in which aerodynamics are of little concern (e.g., large recreational

vehicle). In addition, these systems rely on sizable, fast-moving antenna components and motors that have relatively high power requirements and are that typically less reliable than systems with no moving components. Current phased array antennas utilized in direct broadcast satellite systems are extremely expensive, and still have a large enough
5 physical profile to adversely affect the aerodynamics and aesthetic appearance. Such phased array antennas also have relatively low gain in relation to their large size.

Aside from size, power, and cost factors, mobile satellite reception of direct broadcast satellite signals pose several other unique challenges. These include continuous fine-tuning of the aperture, tracking during loss of signal due to obstacles
10 (e.g., bridges, trees, etc.) or vehicle orientation (e.g., steep banking turns in small aircraft), and reliability of electronics, especially in view of poorly damped physical turbulence.

SUMMARY OF THE INVENTION

15 Accordingly, it is an object of the present invention to provide a compact, low-cost direct broadcast satellite system for use in a mobile craft (e.g., automobiles, vans, trucks, aircraft, boats, etc.).

It is another object of the present invention to provide a direct broadcast satellite system for receiving television and/or data signals in a mobile craft.

20 It is a further object of the present invention to provide a system adapted to receive direct broadcast satellite signals in a mobile craft, using compact and inexpensive components.

The system of the present invention achieves one or more of these objectives by providing a system for receiving broadcast satellite transmissions. Generally, the system may include an orientation system for determining at least a first orientation of the vehicle or mobile craft, in three dimensions, a controller or processor in communication
5 with the orientation system to determine first position control data, and an electronically-pointable antenna adapted to receive the first position control data from the controller to point in accordance therewith, such that a first direct broadcast satellite signal is receivable from a first direct broadcast satellite, and a direct broadcast satellite receiver adapted to process a first radio frequency signal corresponding to a first direct broadcast
10 satellite signal received by the electronically-pointable antenna. The electronically-pointable antenna may be a one-dimensionally electronically-pointable antenna, and, in order to provide two-dimensional pointing, the one-dimensionally electronically-pointable antenna may be mountable upon a turntable system. Alternatively, the electronically-pointable antenna may be two-dimensionally electronically-pointable.
15 Such electronically-pointable antenna systems are compact and inexpensive, and thus facilitate incorporation into various mobile craft.

The orientation system may include a solid-state electromagnetic field sensor and a fluid-filled tilt-sensor to establish absolute orientation of the system or vehicle in which the system is installed. Such orientation information, in three dimensions, may be
20 communicated to the controller or processor to determine first position control data. Location data, for instance from a Global Positioning System receiver may also be used by the controller or processor to determine the first position control data. Such first position control data may include a first look-angle, which is based upon the current

location and orientation of the vehicle and position of the selected direct broadcast satellite, the first look-angle being communicable to the antenna to facilitate reception thereby of a first direct broadcast satellite signal.

The system may be an open-loop system, whereby GPS location information is
5 received by a GPS receiver, orientation data is determined by the orientation system, and
an input is receivable by a user regarding the desired direct broadcast satellite. Such data
may be utilized by the controller or processor to compute a look-angle relative to the
vehicle. Position control data, based upon the computed look-angle, are communicated
to the electrically-pointable antenna during the absence of signal lock, as determined by
10 the state of a signal lock detector component, or in the absence of a signal lock detector,
at all times. The system may include a closed-looped feedback-based system, whereby
the electronically-pointable antenna is continuously adjustable in one or two dimensions,
and operates by receiving differential position outputs of the electronically-pointable
antenna, determining adjustments to the optimal position of the antenna, and sending the
15 adjusted position to the antenna to revise the position control data for the antenna if
signal lock is present, as determined by the state of the signal lock detector.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of one embodiment of the system of the present
20 invention.

Fig. 2 is a schematic diagram of another embodiment of the system of the present
invention.

Fig. 3 illustrates a one-dimensionally electronically-pointable antenna mounted upon a motorized turntable.

5

DETAILED DESCRIPTION

Figs. 1-3 illustrate the various embodiments of the system of the present invention. Referring to Fig. 1, the system 10 includes a Global Positioning System (“GPS”) receiver 20 adapted to receive GPS satellite broadcasts enabling the receiver 20 to determine the approximate location of the system 10 or craft upon which the system 10 is mounted. In a preferred embodiment, the GPS receiver 20 is flush-mounted within the roof of a vehicle in which the system 10 is installed in order to enable clearest reception of the GPS satellite broadcast signals. The GPS receiver 20 is in data communication with a controller or processor 40 via a serial data cable or similar device in order to enable the controller 40 to receive such information and to determine or calculate look-angles to point the antenna at the desired direct broadcast satellite. Such GPS receivers are commercially available from various vendors.

In order to determine the three-dimensional orientation of the vehicle in which the system is installed, this embodiment of the present invention further includes an orientation system 30 for providing orientation data to the controller or processor 40, such orientation data being usable by the controller 40 to determine look-angles to point the antenna of the system (to be described in more detail herein below) at the desired satellite. Specifically, in one embodiment, the orientation system 30 comprises a solid-state electromagnetic field sensor and a fluid-filled tilt-sensor adapted to measure the

three-dimensional orientation of the vehicle in which the system 10 is installed. In this embodiment, the solid-state electromagnetic field sensor and a fluid-filled tilt-sensor utilizes magnetometers and a fluid-filled tilt-sensor to establish absolute compass and tilt orientation of the system 10 without the use of gyroscopes. Such sensors perform minute
5 measurements of the Earth's magnetic field, and use calibration software and the fluid-filled tilt sensor to overcome errors. This electronic compass and tilt-sensor mechanism has no moving parts other than the fluid-filled device, which does not suffer from the reliability difficulties of gyroscopes or other devices, which may require mechanical bearings. While the tilt-sensor device can be affected by lateral acceleration forces to
10 cause inaccurate readings, the tilt-sensor device allows for accurate position tracking during any period of vehicle movement without heavy acceleration. This allows the antenna of the system 10 to be pointed accurately during most vehicle operations. But in the event the system includes a closed-loop fine-tuning mechanism, the signal from the direct broadcast satellite will be signal-locked while the vehicle moves without
15 accelerating, and then a fine-tuning mechanism (to be described in more detail herein below in relation to Fig. 2), will hold the lock regardless of any acceleration forces. In the event the system does not include fine-tuning mechanism, a controller 40 (to be described in more detail herein below) may be adapted to determine the correct vehicle position by using time-differentiation of the compass orientation to determine the amount
20 at which to compensate for tilt-sensor errors due to lateral acceleration, by methods known in the art. The orientation system comprising an electronic compass and tilt-sensor are available from a variety of commercial vendors, such as Precision Navigation

Inc., and the three-dimensional position data may be communicated to the controller 40 via a digital or analog output, such as an EIA/TIA-232 serial link.

As noted in Fig. 1, the system 10 further includes the controller 40, which is adapted to receive the location data from the GPS receiver 20 and the three-dimensional orientation data from the orientation system 30. The controller 40 is also adapted to receive from a first user a first input corresponding to a first desired direct broadcast satellite. Pre-cached information or information from the GPS receiver 20 is also utilized by the controller 40 to determine true north orientation of the system 10 from the GPS location data and the magnetic position of the compass of the orientation system 30 of the present invention. In this regard, the controller is adapted to utilize this information and to perform any coordinate conversions as necessary to compute look-angles relative to the vehicle with which the system 10 is mounted, based upon the user-selected direct broadcast satellite, current location and orientation of the vehicle. The controller 40 is adapted to determine position control inputs or data based upon the computed look-angle, and transmits such position control data to the antenna 50. In the event there is no closed-loop fine-tuning circuit, such position control data is transmitted to the antenna 50 continuously. Otherwise, if the system 10 includes a closed-loop fine-tuning circuit, the position control data is sent to the antenna 50 by the controller 40 during absences of signal lock, as determined by the state of a signal lock detector which controls the activation/deactivation of the closed-loop fine-tuning circuit. Such signal lock detectors and closed-loop fine-tuning circuits are commercially available. Position control of the antenna 50 comes from the controller 40 during initial acquisition or lost signal. The

Antenna 50 is otherwise controlled by the closed-loop fine-tuning circuit which continuously adjusts position of antenna 50.

In one embodiment, the controller 40 includes a personal computer, such as an Embedded Windows NT or Windows CE computer, with PCMCIA input/output cards to exchange data with the other system elements (e.g., receiver 20, orientation system 30, antenna 50). This will allow for simple and inexpensive modifications and upgrades to the system 10. It could also provide the cost/saving benefits of a built-in television and multi-media display and web browsing capabilities to the occupants of the vehicle in which the system 10 is installed, without the need for external television monitors or web-browsing devices.

As noted above, the system 10 can be open-loop in nature in that the controller 40 can utilize data from the orientation system 30 and the GPS receiver 20 to calculate coarse look-angle for the antenna 50 in order to point it at all times. In another embodiment, illustrated in Fig. 2, the controller 40 includes a signal lock detector and closed-loop feedback control circuit 70, whereby once the antenna 50 is pointed by approximation (e.g., X-Y input positions) and the expected direct broadcast signal is detected on the antenna 50 by the signal lock detector, the closed-loop fine-tuning feedback circuit begins steering the antenna 50 and input from the controller 40 will not be needed until signal is lost again. Such loss of signal may be due to obstacles or unusual vehicle orientation. In this regard, the controller 40 is designed to steer the antenna 50 during these periods of initial signal acquisition or loss of signal. The antenna 50 can be steered to optimum reception during periods of satellite visibility, and held close to the optimum position during periods of occlusion, in order to minimize time to

regain the best reception when the satellite becomes visible again. In these such cases, the antenna 50 acts as a “mono-pulse feed”. By comparing how much the signal from the direct broadcast satellite is coming in to, for example, the left side of the antenna compared to the right side, with the top of the antenna compared to the bottom, the antenna 50 may be adapted to put out two or more “differential” outputs, to thereby point the antenna slightly left or slightly right, or slightly up or slightly down, depending on how the antenna 50 is configured. In this regard, the antenna 50 may be capable of very fine directional tuning in one or both dimensions (e.g., X-Y dimensions or Azimuth and Elevation dimensions). In the event the antenna 50 is capable fine position control in at least one dimension, the overall cost of the system 10 may be reduced by including the closed-loop fine-tuning circuit 80, so that less precise and less expensive GPS and orientation system elements may be used, and less computing power may be required of the controller 40.

Referring to Fig. 1, and as noted herein above, the system 10 includes an electronically-pointable antenna 50 capable of being installed on the roof of a car, truck, boat, airplane or other mobile craft with little or no adverse affect on vehicle aerodynamics. As opposed to a reflecting parabolic dish, which must be physically pointed at the desired satellite, the antenna 50 of the system 10 of the present invention is electronically-pointable. In one embodiment, the antenna 50 has a substantially flat physical profile and comprises, for example, a small phased array or plasma grating antenna capable of position scanning in two dimensions. Position scanning in two dimensions refers to the capability of such antennas to change their internal electronic configuration in such a way as to enable such antenna to selectively receive the signal

from a particular direction, selectable along two orthogonal axes. This direction is referred to as the direction in which the antenna is "pointed", even though the antenna 50 may not physically move at all, hence the term "electronically-pointable". In one embodiment, the antenna 50 comprises a phased array antenna, such as those currently available from Harris Corp. and the Boeing Corp. In another embodiment, the antenna 50 comprises a scanning array available from ThermoTrex Corporation or a plasma grating antenna commercially available from WaveBand Corporation. In the event such antennas 50 are capable of electronically pointing only in one dimension, in order to achieve two-dimensional pointing, the antenna 50 may be mounted on a flat motorized turntable 54 such as illustrated in Fig. 3. Electronic pointing in a single dimension may be continuously adjustable or discretely adjustable. For example, antennas such as an older phased array system and the antennas built by ThermoTrex Corporation, such as a scanning array, can generally be adjusted to point in a continuum of positions along an axis, and these antennas can be continuously fine-tuned using a feedback loop control circuit illustrated in Fig. 2 for an exact direction along the axis. Conversely, plasma grating antennas, such as those available from WaveBand Corporation, must point in one of a fixed number of directions along an axis. These antennas must continuously be set for the best approximation of the desired pointing direction.

As indicated above, and referring to Fig. 3, a one-dimensionally electronically-pointable antenna 50 may be mounted on a motorized turntable 54 in order to give it two-dimensional pointing capability. The orientation of the turntable 54 can be continuously variable and could be kept pointed at the correct relative Azimuth of the desired direct broadcast satellite with an electronic feedback loop, while the antenna 50 mounted on the

turntable 54 would be adjusted for the correct relative elevation. In an alternative embodiment, the antenna 50 comprises an electronically-pointable antenna adapted to be pointed along both axes or dimensions. For example, the relative Azimuth and Elevation (i.e., spherical coordinates) of the desired direct broadcast satellite can be converted in to X-Y directions (i.e., Cartesian coordinates) and the antenna 50 would be pointed along X and Y axes relative to the orientation of the vehicle in which the system antenna is mounted.

As noted above, the antenna 50 is adapted to receive position control data or look-angles from the controller 40 which dictate the direction in which the antenna 50 is to point in two-dimensions. As such, once the antenna 50 is pointed at the desired broadcast satellite, a direct broadcast satellite radios signal may enter the antenna 50. Direct broadcast radios signals may be received into the aperture of the antenna 50 and transmitted to a direct broadcast satellite receiver 60 of the system 10. This may occur after filtering and down-conversion to a lower frequency. In one embodiment, the antenna 50 has a single radio frequency output, with polarization determined by a polarization input designed to select the appropriate polarization to match a particular incoming direct broadcast signal. For example, a direct broadcast satellite receiver may switch the polarization of the antenna 50 between right-hand circular and left-hand circular polarization in order to change between two adjacent digital television channels on a typical direct broadcast satellite system. Other antennas 50 may have an independent radio frequency output for each desired signal polarization. In either case, this output is receivable by the receiver 60. This output may also be fed to a circuit controller 40 in order to determine the strength of the incoming direct broadcast signal,

for determining presence or absence of a signal lock. In this embodiment, the antenna 50 includes signal outputs in addition to a primary radio frequency output, which provides relative directional signal strength of the incoming signal from the direct broadcast satellite in order to track the satellite position using a closed-loop feedback control circuit 5 80, substantially as described herein above in relation to Fig. 2.

As noted above, the system 10 further includes a direct broadcast system receiver 60, commonly known as a set-top box or a satellite modem for data service or a functional equivalent of one or both of these. Such receivers 60 are available from various vendors. Receiver 60 may comprise, for example, one television and one data 10 receiver, each using output from the antenna 50. The main input to the receiver 60 is the radio frequency output of the antenna 50. This input to the receiver 60 may be via a single cable with a separately selected signal polarization or multiple cables with different polarizations. Output from the receiver 60 is audio and video signals to a television, CRT or other audio/video electronics or a data connection (e.g., Ethernet) to a 15 computer in the case of a satellite modem-type receiver. Alternatively, the satellite modem may be installed directly into a personal computer or similar computer. Either television or data from the receiver 60 can be displayed on the computer component of the controller 60, as noted herein above to save costs, or to a separate display unit.

The foregoing description of the invention has been presented for purposes of 20 illustration and description. Furthermore, the description is not intended to limit the invention to the form disclosed herein. Consequently, variations and modifications consistent with the above teachings and with the skill or knowledge of the relevant art are within the scope of the present invention. The embodiments described hereinabove are

further intended to explain the best modes known for practicing the invention and to enable other skilled in the art to utilize the invention in such, or, other embodiments and with various modifications required by the particular applications or uses of the present invention. It is intended that the appended claims should be construed to include

5 alternative embodiments to the extent permitted by the prior art.

IN THE CLAIMS:

1. A system for receiving broadcast satellite transmissions in one of an air-based, a land-based, and a sea-based vehicle, said system comprising:

an orientation system for determining at least a first orientation of the vehicle in
5 three dimensions;

a controller in communication with said orientation system, said controller adapted to receive first orientation data corresponding to said first orientation of the vehicle and to receive first location data corresponding to the vehicle, wherein said controller utilizes said first orientation data and said first location data to determine first
10 position control data;

an electronically-pointable antenna adapted to receive said first position control data from said controller, wherein said electronically-pointable antenna is pointable in accordance with said first position control data to receive a first direct broadcast satellite signal; and

15 a direct broadcast satellite receiver adapted to process a first radio frequency signal corresponding to said first direct broadcast satellite signal received by said electronically-pointable antenna to produce at least one of the first audio output, a first video output, and a first data output.

2. A system as claimed in Claim 1, wherein said electronically-pointable
20 antenna comprises a one-dimensionally electronically-pointable antenna, said system further comprising:

a turntable system upon which said one-dimensionally electronically-pointable antenna is mountable to provide two-dimensional pointing.

3. A system, as claimed in Claim 2, wherein said controller comprises a feedback loop for controlling a rotational orientation of said one-dimensionally electronically-pointable antenna on said turntable.

4. A system, as claimed in Claim 1, wherein said electronically-pointable
5 antenna comprises one of a phased array antenna and a plasma grating antenna.

5. A system, as claimed in Claim 1, wherein said electronically-pointable antenna is adapted to electronically point in a first and a second dimension.

6. A direct broadcast satellite system, as claimed in Claim 1, wherein said orientation system comprises a first electronic compass and tilt-sensor.

10 7. A direct broadcast satellite system, as claimed in Claim 1, wherein said orientation system comprises a first solid-state electromagnetic field sensor and a first fluid-field tilt-sensor adapted to provide said first orientation data of the vehicle.

8. A direct broadcast satellite system, as claimed in Claim 1, wherein said controller comprises an open-loop control system adapted to process said first location
15 data, said first location data received from a Global Positioning System receiver in communication with said controller, said first orientation data from said controller, and position and signal characteristic data corresponding to a first satellite to determine said first position control data comprising at least a first coarse look-angle position data to point said electronically-pointable antenna in first and second dimensions at said first
20 satellite.

9. A direct broadcast satellite system, as claimed in Claim 8, said system further comprising a signal lock detector for at least detecting a first loss of said first direct broadcast satellite signal.

10. A direct broadcast satellite system, as claimed in Claim 9, wherein said controller further comprises a closed-loop feedback circuit adapted for controlling steering of said electronically-pointable antenna.

11. A direct broadcast satellite system for receiving in a mobile craft a first signal from a first direct broadcast satellite, said system comprising:

an orientation system for determining at least a first orientation of the mobile craft in three dimensions;

5 a processor, in communication with said orientation system, for determining first position control data from at least first orientation data corresponding to said first orientation of the mobile craft and from first location data of the mobile craft; and

an electronically-pointable antenna, in communication with said processor, adapted to be pointed in accordance with said first position control data, wherein the first
10 signal from the first direct broadcast satellite is receivable by said electronically-pointable antenna.

12. A direct broadcast satellite system as claimed in Claim 13, wherein said processor is adapted to receive a first input from a user, said first input corresponding to selection of the first direct broadcast satellite.

15 13. A direct broadcast satellite system as claimed in Claim 13, wherein said orientation system is adapted to determine a first true north orientation of the mobile craft from first magnetic north data, wherein said first true north orientation is used in determining said first orientation of said mobile craft.

14. A direct broadcast satellite system as claimed in Claim 13, wherein said
20 processor includes a first memory for storing at least a first orbit position of the first direct broadcast satellite, wherein said first orbit position is used by said processor to determine said first position control data.

15. A direct broadcast satellite system as claimed in Claim 13, further comprising a Global Positioning System receiver in communication with said processor for receiving at least first location information of the mobile craft, wherein said processor uses said first location information to determine said first position control data.

5 16. A direct broadcast satellite system as claimed in Claim 13, further comprising a direct broadcast receiver for processing a first radio frequency signal corresponding to said first direct broadcast satellite signal received by said electronically-pointable antenna to produce at least one of the first audio output, a first video output, and a first data output.

10

ABSTRACT OF THE DISCLOSURE

A system for receiving direct broadcast satellite signals in a mobile craft is disclosed. Generally, the system includes an orientation system for determining the first orientation of the mobile craft, a controller or processor for determining first position control data, and an electronically-pointable antenna adapted to receive first position control data from the controller, such that the antenna is pointable in accordance therewith, such that a first direct broadcast satellite signal is receivable from a first direct broadcast satellite, and a direct broadcast satellite receiver for processing a first radio frequency signal corresponding to the first direct broadcast satellite signal received by the electronically-pointable antenna.

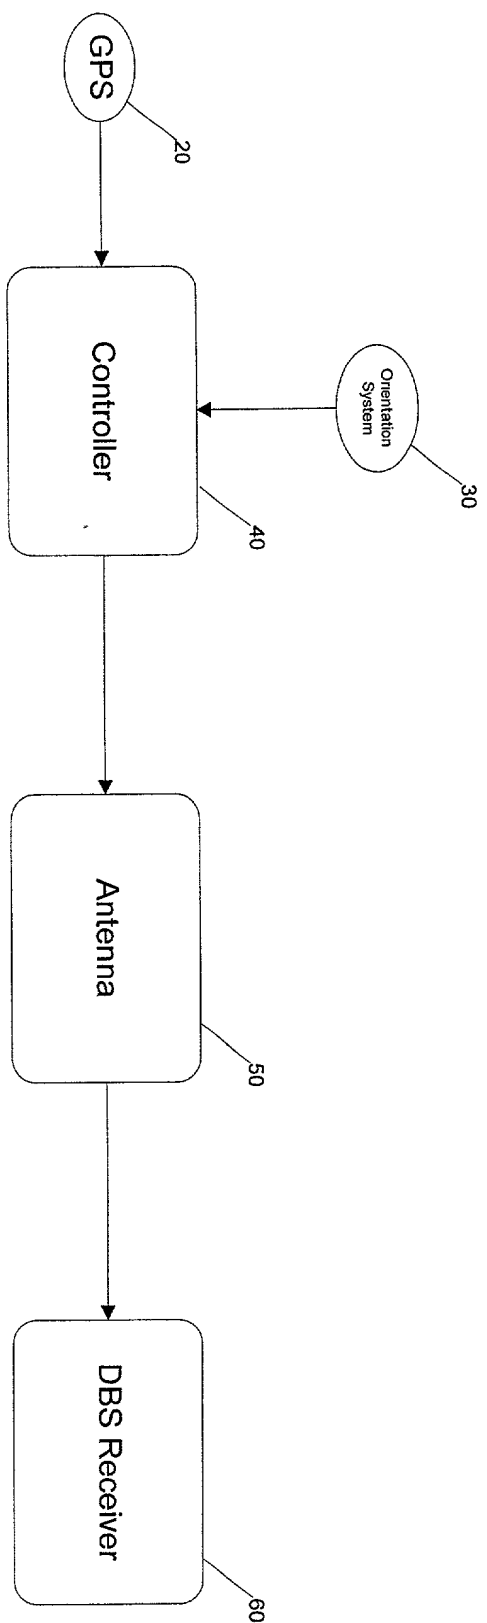


FIG. 1

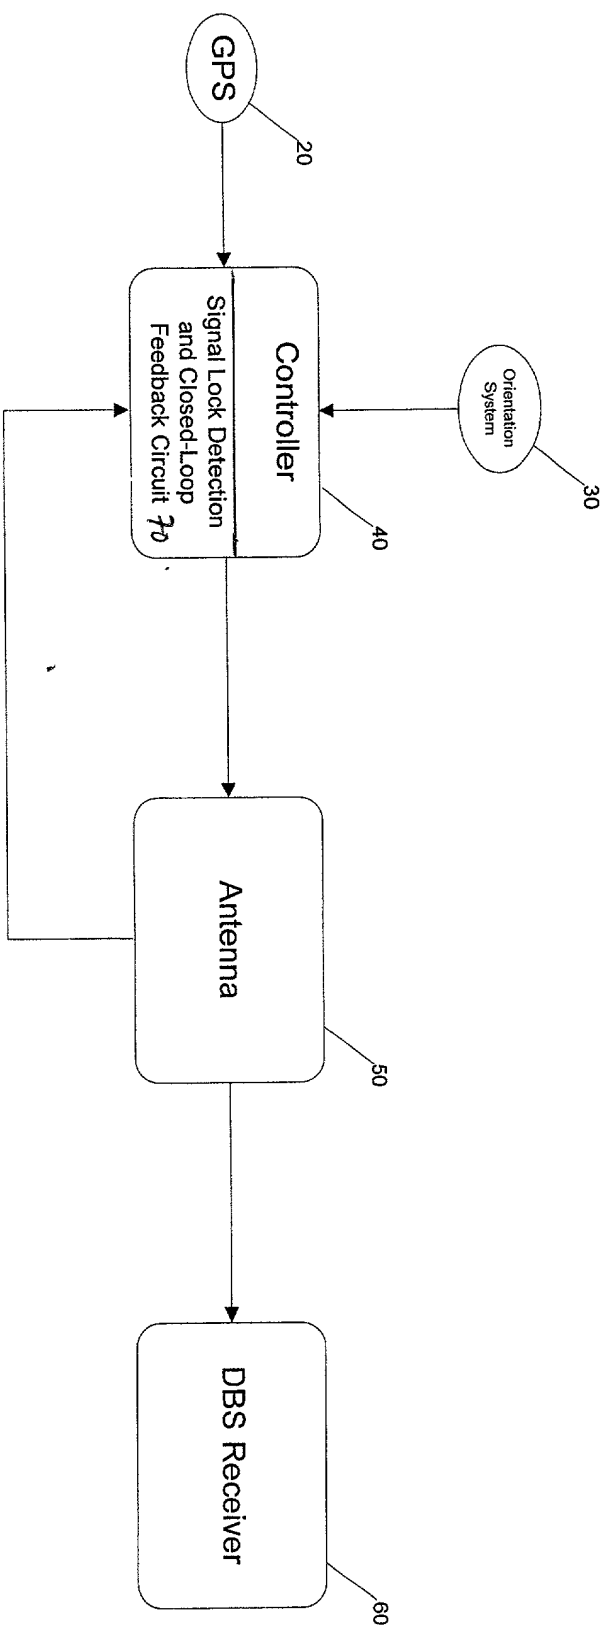


FIG. 2

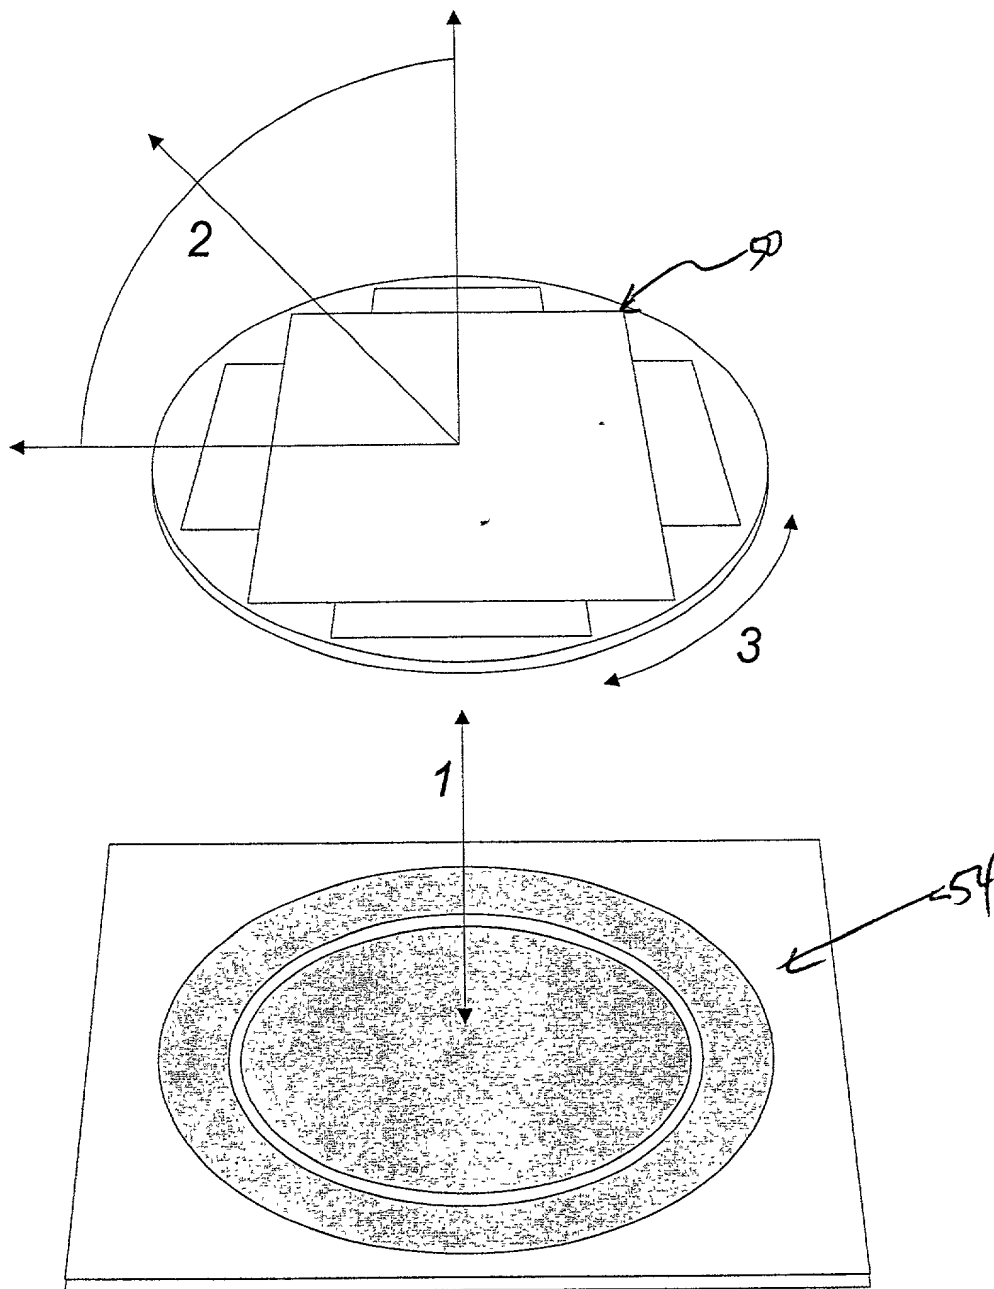


FIG. 3

Docket No.
45118-00026

Declaration For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SYSTEM FOR ACCESS TO DIRECT BROADCAST SATELLITE SERVICES

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International
Application Number _____
and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

<u>60/192,494</u>	<u>March 28, 2000</u>
(Application Serial No.)	(Filing Date)
 <u> </u>	 <u> </u>
(Application Serial No.)	(Filing Date)
 <u> </u>	 <u> </u>
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, CFR Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u> </u>	<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
 <u> </u>	 <u> </u>	 <u> </u>
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
 <u> </u>	 <u> </u>	 <u> </u>
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor	
Jeb R. Linton	
Sole or first inventor's signature	Date
<i>Jeb R. Linton</i>	Aug. 2, 2000
Residence	
8235 Depot Place, Manassas, Virginia 20112	
Citizenship	
USA	
Post Office Address	
8235 Depot Place, Manassas, Virginia 20112	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of third inventor, if any	
Third inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of fourth inventor, if any	
Fourth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	